


Self-regulating heating cable

Heating cable construction: **FroStop Green, FroStop Black**

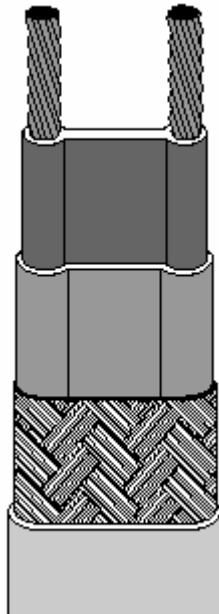

1. Copper conductors 1,2 mm²
2. Self-regulating conductive core
3. Modified polyolefin insulation
4. Tinned cooper braid
5. Modified polyolefin outer jacket

Nominal power output (W/m) at 5 °C	FroStop Green	10
	FroStop Black	18

Supply voltage (V)	230
Minimum bend radius (mm)	10

		FroStop Green	FroStop Black
Product dimensions			
	Thickness (mm)	6,2	6,2
	Width (mm)	14,2	14,2
Maximum exposure temperature (°C)	Continuous	65	65
	Intermittent (power on)	85	85
Colour of outer jacket		green	black