

### Features/Applications


GREMTUBE® MV Termination kit is a medium and heavy wall, irradiated polyolefin heat shrink tubing 1 and 3-core termination kit.  
 GREMTUBE® MV Termination kit offers excellent electrical insulation and mechanical protection up to 24/36kV for 1 and 3-core indoor and outdoor applications.  
 GREMTUBE® MV Termination kit is suitable for 35mm<sup>2</sup> to 1000mm<sup>2</sup> XLPE cables.

### Various

Standard colour: Black.

### Specifications

Cenelec HD 629

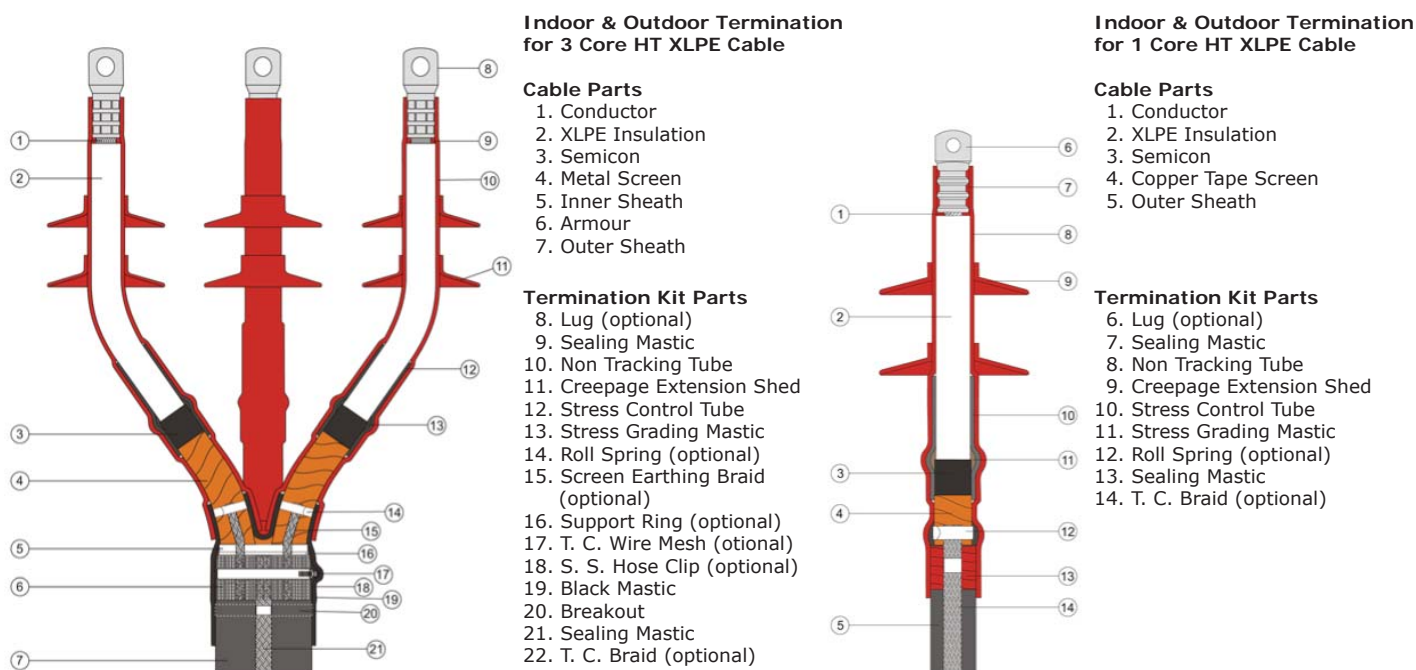

Part. No.	Voltage Class	Description	complete with screen earthing
GTI 36X 35-95-1	24/36kV	Indoor termination for 35-95mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTI 36X 95-185-1	24/36kV	Indoor termination for 95-185mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTI 36X 185-300-1	24/36kV	Indoor termination for 185-300mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTI 36X 300-630-1	24/36kV	Indoor termination for 300-630mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTI 36X 630-1200-1	24/36kV	Indoor termination for 630-1200mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTO 36X 35-95-1	24/36kV	Outdoor termination for 35-95mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTO 36X 95-185-1	24/36kV	Outdoor termination for 95-185mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTO 36X 185-300-1	24/36kV	Outdoor termination for 185-300mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTO 36X 300-630-1	24/36kV	Outdoor termination for 300-630mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)
GTO 36X 630-1200-1	24/36kV	Outdoor termination for 630-1200mm <sup>2</sup> XLPE/CWS cables	(set of 3 phases)

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 35°C) and in closed containers.



30/3/2015 Rev2

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.