

Features/Applications

GREMTUBE® MV Termination kit is a medium and heavy wall, irradiated polyolefin heat shrink tubing 3-core termination kit.
GREMTUBE® MV Termination kit offers excellent electrical insulation and mechanical protection up to 7.2kV for 3-core indoor and outdoor applications.
GREMTUBE® MV Termination kit is suitable for 35mm² to 300mm² XLPE cables.


Various

Standard colour: Black.

Specifications

Cenelec HD 629

Indoor & Outdoor Termination for 3 Core HT XLPE Cable

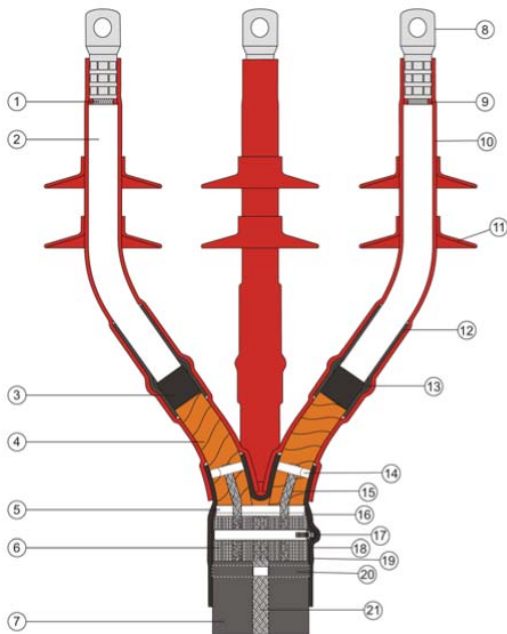

Cable Parts

- 1. Conductor
- 2. XLPE Insulation
- 3. Semicon
- 4. Metal Screen
- 5. Inner Sheath
- 6. Armour
- 7. Outer Sheath

Termination Kit Parts

- 8. Lug (optional)
- 9. Sealing Mastic
- 10. Non Tracking Tube
- 11. Creepage Extension Shed
- 12. Stress Control Tube
- 13. Stress Grading Mastic
- 14. Roll Spring (optional)
- 15. Screen Earthing Braid (optional)
- 16. Support Ring (optional)
- 17. T. C. Wire Mesh (optional)
- 18. S. S. Hose Clip (optional)
- 19. Black Mastic
- 20. Breakout
- 21. Sealing Mastic
- 22. T. C. Braid (optional)

Part. No.	Voltage Class	Description	complete with screen earthing
GTI 7.2X 35-95-3/e	7.2kV	Indoor termination for 3 x 35-95mm ² XLPE cables	c/w sreen earthing
GTI 7.2X 120-300-3/e	7.2kV	Indoor termination for 3 x 120-300mm ² XLPE cables	c/w sreen earthing
GTO 7.2X 35-95-3/E	7.2kV	Outdoor termination for 3 x 35-95mm ² XLPE cables	c/w sreen + armour earthing
GTO 7.2X 120-300-3/E	7.2kV	Outdoor termination for 3 x 120-300mm ² XLPE cables	c/w sreen + armour earthing

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 35°C) and in closed containers.



Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.