


2xMTP-2xMTP Single Mode Breakout

Properties

MTP Connector Compliance	IEC 61754-7, TIA 604-5, RoHS
Base-8	16 Fibers
Base-12	24 Fibers
Base-24	48 Fibers
Cable Diameter	6.6mm
Subunit Diameter	3.0mm
Operating Temperature	-10°C to +70°C
Flammability	UL94 V-0
Durability	> 100 mating cycles
Transmission with Applied Tensile Load	50 Newton
Insertion Loss: IEC 61300-3-4-MB	Average: 0,10dB, Max: 0,35dB
Return Loss: IEC 61300-3-6-MB	Singlemode: ≥ 60dB

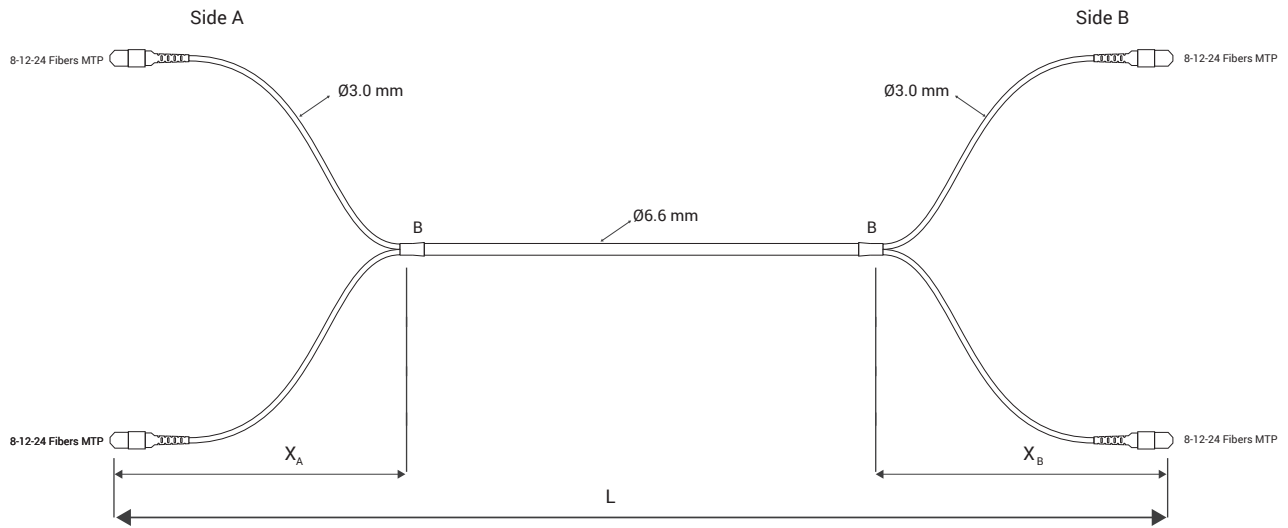

* X (Tube Length) is standard 500mm. Please contact us for different tube length.

Sample Coding

I - PC - 24 - MB - 663 - A2 - B - 02MTPEf - 02MTPEf - 005M

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	Polorization	1. Connector	2. Connector	Length
Indoor:	I Patch Cord: PC	8x2 Fibers: 16 12x2 Fibers: 24 24x2 Fibers: 48	MTP/Breakout: MB	6.6/3.0mm: 663	SM G.657 A2: A2	A Polorization: A B Polorization: B	2xMTP-Female: 02MTPEf 2xMTP-Male: 02MTPEm	2xMTP-Female: 02MTPEf 2xMTP-Male: 02MTPEm	...M