
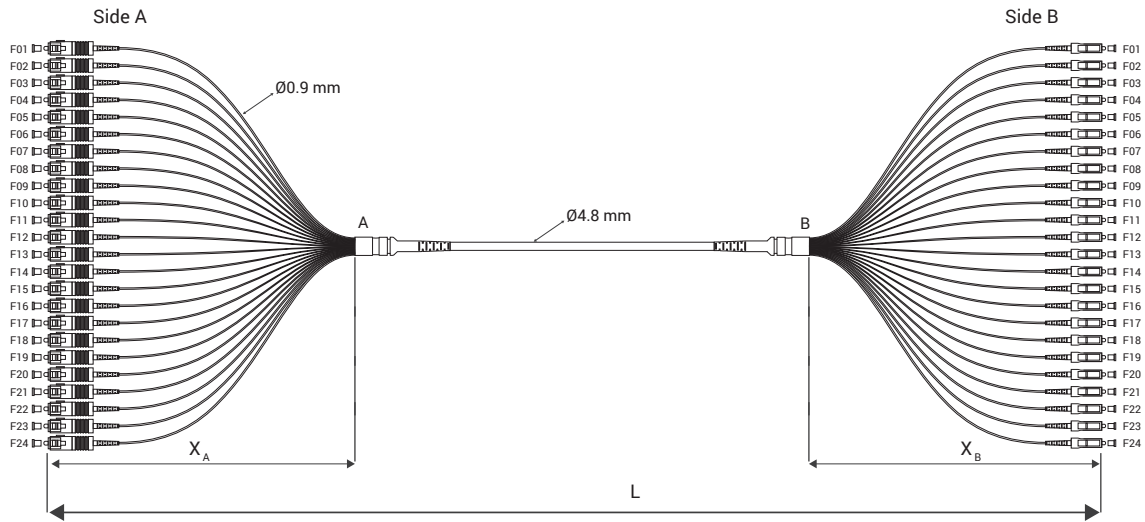
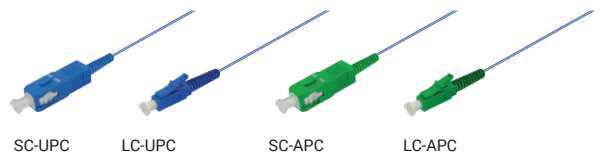


## 24 Fibers Single Mode Fanout | 0.9mm

### Properties

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
Fiber Count	24 Fibers
Cable Diameter	4.8mm
Subunit Diameter	0.9mm
Alignment Technology	Full ceramic ferrule (Zirconia ZrO2)
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	> 1000 mating cycles
Transmission with Applied Tensile Load	GR-326 CORE 4.4.3.5
Insertion Loss: IEC 61300-3-4-MB	Singlemode: ≤ 0.30dB
Return Loss: IEC 61300-3-6-MB	Singlemode UPC : ≥ 50dB Singlemode APC : ≥ 60dB
Connector End Face Geometry	IEC 61755-3

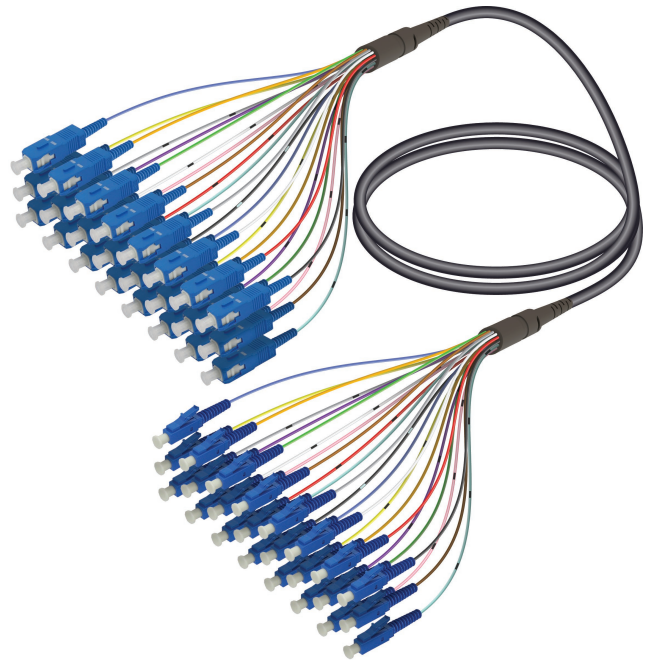

\* X (Tube Length) is standard 1000mm. Please contact us for different tube length.

Sample Coding **U - PC - 24 - FC - 409 - A2 - 24SCS - 24LCS - 005M**

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length
Universal: U	Patch Cord: PC	24 Fibers: 24	Fanout: FC	4.8/0.9mm: 409	SM G.657 A2: A2	SC-UPC: 24SCS SC-APC: 24SAS LC-UPC: 24LCS LC-APC: 24LAS	SC-UPC: 24SCS SC-APC: 24SAS LC-UPC: 24LCS LC-APC: 24LAS	__M