


Raychem MONI-PT100-260/2

TEMPERATURE SENSOR WITH M16 GLAND

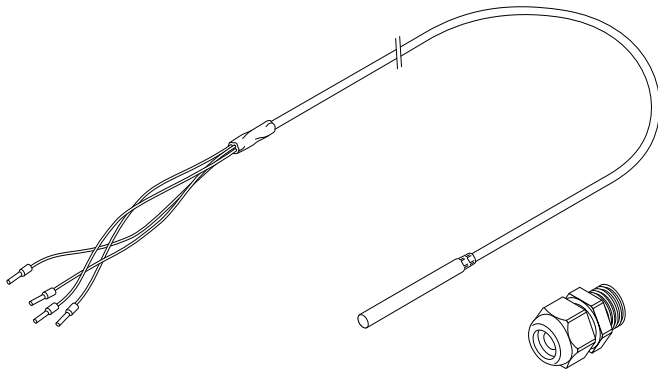

PRODUCT OVERVIEW

MONI-PT100-260/2 temperature sensor is designed for providing accurate temperature measurements.

The MONI-PT100-260/2 sensor exhibits excellent mechanical, electrical and thermal properties what makes the sensor extremely useful for a broad range of applications. The sensor can be connected to the control device using 3-wire technology for providing highest accuracy and measuring stability.

AREA OF USE

Non hazardous area or hazardous area Zone 1, Zone 21 or Zone 2, Zone 22 when connected to intrinsic safe circuits

SENSOR

Type	Pt 100 (3 wire) DIN IEC 751, Class B
Jacket/Sheath Material	Extension cable PTFE (Fluoropolymer) Measuring tip stainless steel (316 Ti)
Cable construction	Braided
Measuring range	-50°C to 260°C
Maximum exposure temp. tip	400°C
Length	Total sensor length 2 m (other lengths are available on request) Length of the measuring tip ca 50 mm
Nominal Diameter (OD)	Diameter of the sensor cable 4.8 mm Diameter of the tip 6 mm.
Conductors	4 x 0.5 mm ² (Red, Red, White and braid) PTFE insulated
Minimum bending radius	Sensor cable minimum 20 mm, The measuring tip should not be bent

CABLE GLAND

Approvals	II 2GD EEx e II PTB 05 ATEX 1068 X
Thread size (color)	M16 (Black)
Material	Polyamide (PA) Halogen-free
Temperature range	-40°C to +75°C
Cable acceptance size	Suitable for cables from 4 to 9 mm diameter
PN (Weight)	704058-000 (0.12 kg)



WWW.PENTAIRTHERMAL.COM

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

UNITED KINGDOM

Tel: 0800 969 013
Fax: 0800 968 6241
salesthermaluk@pentair.com

IRELAND

Tel: 1800 654 241
Fax: 1800 654 240
salesie@pentair.com

All Pentair trademarks and logos are owned by Pentair or its global affiliates. Pentair reserves the right to change specifications without prior notice.

© 2012-2014 Pentair.