


SECTION A-A

PINOUT TABLE	
J1	STS
J1-P1	P1
J1-P2	P2
J1-S1	S1
J1-S2	S2

STANDARD PINOUT TABLE
ALTERNATES AVAILABLE
(SEND REQUEST WITH P.O.)

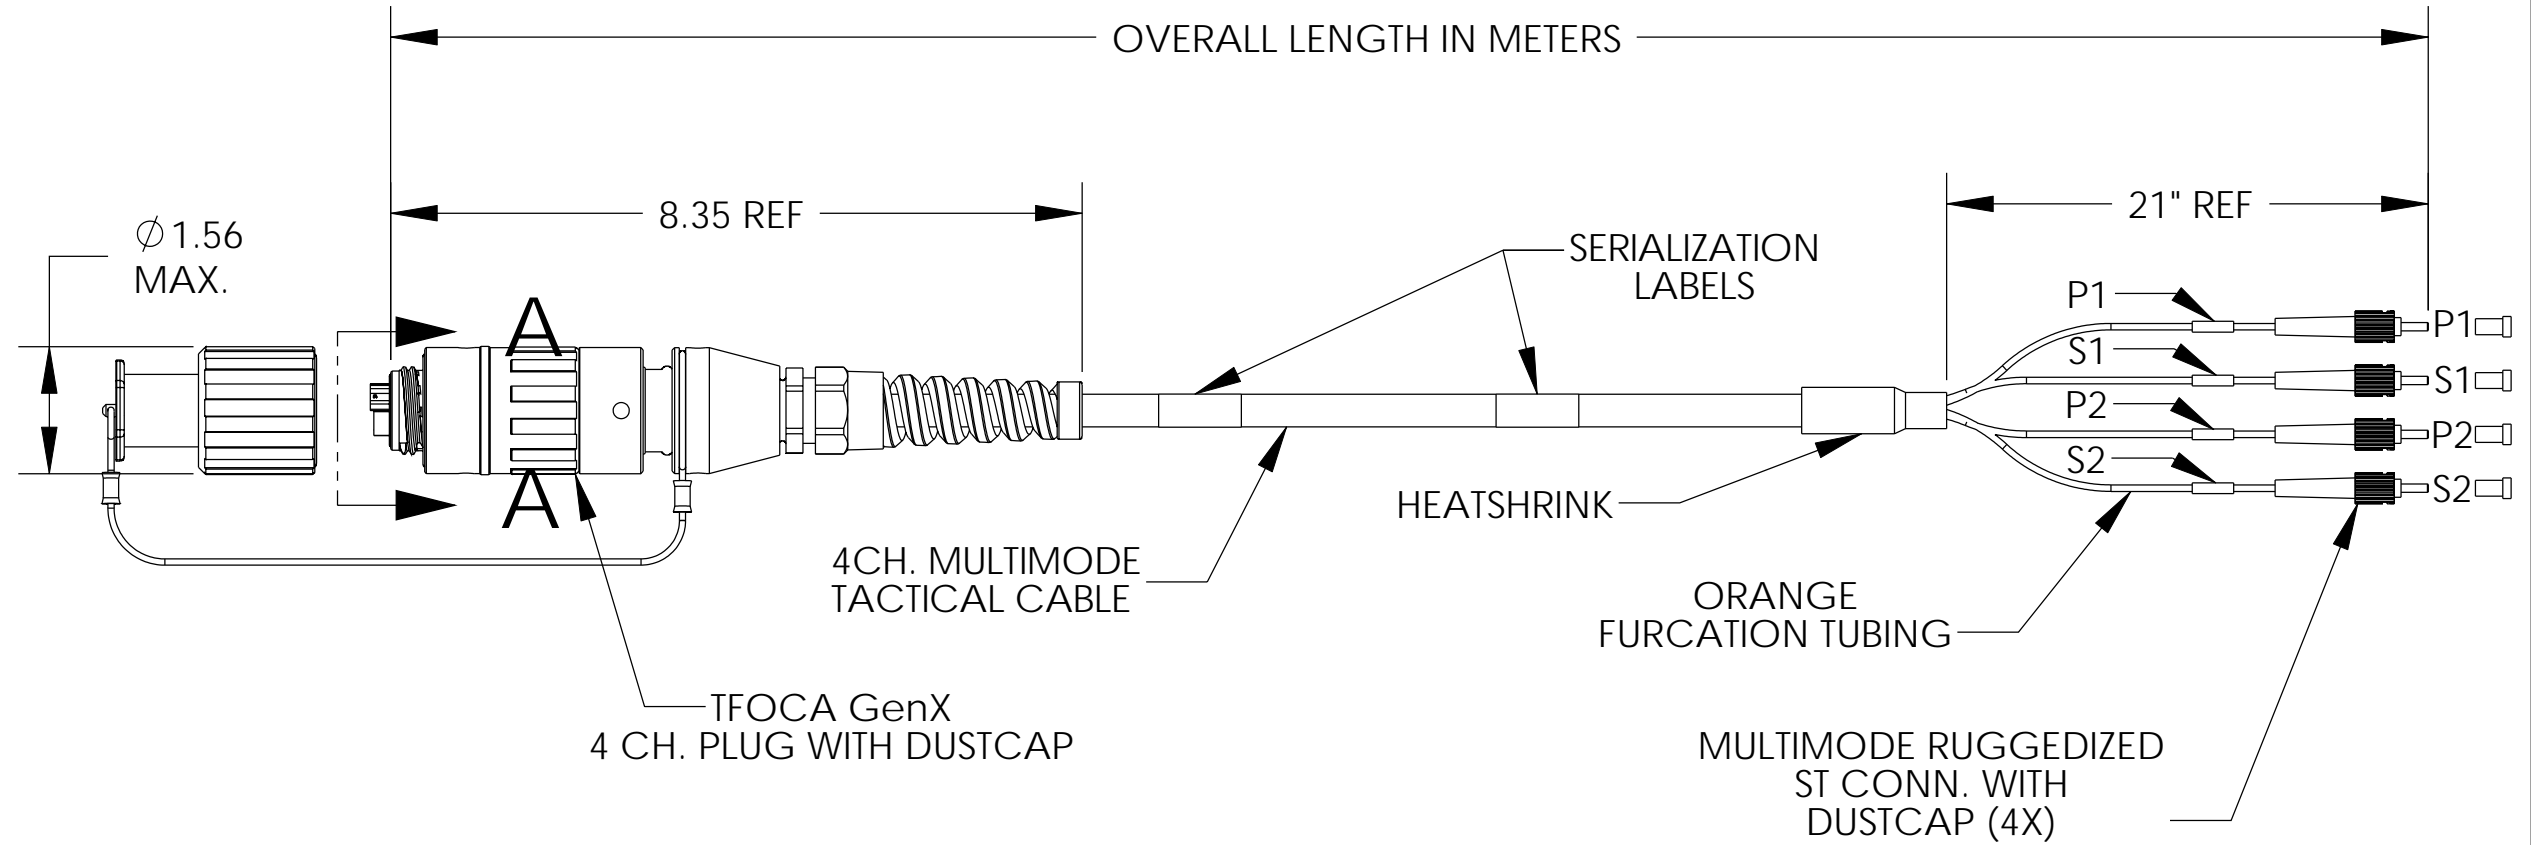

NOTES:

1. MATERIAL: PLUG BODY, AND DUSTCAP; ALUMINUM 6061-T6
2. FINISH: ZINC NICKEL
3. ALL SEALS ARE EPDM
4. MAX. MULTIMODE LINK LOSS @ 1300nm = .75dB FOR TFOCA GenX TERMINI + .50dB FOR ST + CABLE ATTENUATION OF .0005dB/m X CABLE LENGTH IN METERS. CABLE ATTENUATION NEGLIGIBLE IN LENGTHS LESS THAN 100 METERS.

		39 GREAT HILL RD NAUGATUCK, CT 06770 (203) 729-2572
TITLE:	CABLE ASS'Y, 4 CH. TFOCA GenX PLUG TO 4 ST'S, ZINC/NICKEL	
LAST UPDATE:	11-24-09	